




PCT/GB 00 / 03203



GB 00/03203

DOCUMENT DE
PRIORITE
PRESENTE OU TRANSMIS
CONFORMEMENT A LA REGLE
17.1.a) OU b)

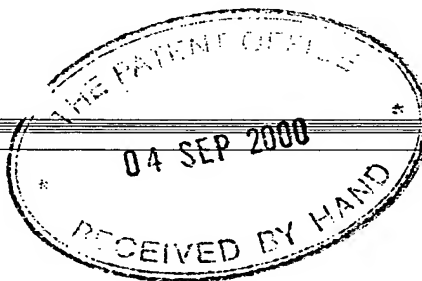

INVESTOR IN PEOPLE

REC'D 27 SEP 2000

The Patent Office

Concept House

PCT

Cardiff Road

Newport

South Wales

NP10 8QQ

H2

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

re-registration under the Companies Act does not constitute a new legal entity but merely re-records the company to certain additional company law rules.

Signed

Andrew Gersey

Dated

18 August 2000




17 AUG 1999

1/77

16AUG99 5470337-1 002882

P01/7700 0.00 9919462.3

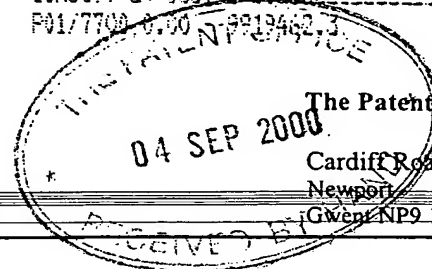**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference SEM/53531/000

2. Patent application number
(The Patent Office will fill in this part) **9919462.3** 17 AUG 1999

3. Full name, address and postcode of the or of each applicant (underline all surnames)

BAKER HUGHES LIMITED
455 LONDON ROAD
ISLEWORTH
MIDDLESEX
UNITED KINGDOM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4010039004

4. Title of the invention HYDROCYCLONE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

BOULT WADE TENNANT
27 FURNIVAL STREET
LONDON
EC4A 1PQ

42001

BOULT WADE TENNANT.
VERULAM GARDENS
70 GRAY'S INN ROAD
LONDON
WC1X 8BT

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request?

YES

(Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 8

Claim(s) 3

Abstract 1

Drawing(s) 4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents (Please specify)

11

I/We request the grant of a patent on the basis of this application.

Signature

Date

17 August 1999

12. Name and daytime telephone number of person to contact in the United Kingdom

SARAH MERRIFIELD
020 7430 7500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

HYDROCYCLONE

5 FIELD OF THE INVENTION

The field of this invention relates to cyclonic separation of solids from liquids or liquids from liquids.

BACKGROUND OF THE INVENTION

10 Cyclones have been in use in separation applications in a variety of industries for many years. Typically, these devices have a cylindrical body tapering to an underflow outlet, with a tangential or involute entrance and a centrally located end connection for the overflow fluids at the head end of the hydrocyclone. These devices are used to separate fluids of different densities
15 and/or to remove solids from an incoming stream of a slurry of liquid and solids, generally concentrating the solids in the underflow stream.

Over the years, many efforts have been undertaken to optimize the performance of hydrocyclones. Performance increase could be measured as an increase in throughput without material sacrifice in the degree of separation desired for a given operating pressure drop. An alternate way to measure
20 improved performance is to increase the separation efficiency for a given inlet flow rate and composition.

In the past, a cyclone has been provided with a single ramp presenting a generally planar face extending at a relatively shallow angle to a radial plane
25 of the hydrocyclone and thus inclined toward the underflow end of the hydrocyclone. Thus, when the fluid enters from the inlet, the fluid swirls about the

axis of the chamber, with the back wall imparting to the mixture an axial velocity component in the direction toward the underflow outlet. This design is illustrated in PCT application WO97/05956. Also relevant to a general

5 understanding of the principles of operation of hydrocyclones are PCT applications WO97/28903, WO89/08503, WO91/16117, and WO83/03369; U.K. specification 955308; U.K. application GB 2230210A; European applications 0068809 and 0259104; and U.S. patents 2,341,087 and 4,778,494,

10 In the past, a single helix of a uniform pitch was used to present an inclined surface to the incoming mixture. The inclined surface terminated at a step after the incoming mixture had undergone a complete revolution within the separating chamber. Thus, this prior design, illustrated in PCT application WO97/05956, took the entire incoming fluid stream and imparted a generally uniform velocity axial component to the generally helical flowpath of that entire incoming stream.

15 However, applicants' detailed studies of the axial flow of the fluid after it enters the hydrocyclone have revealed that, as viewed in a radial direction from the longitudinal centerline of the hydrocyclone, a preferred flow pattern would be nonuniform, with the greatest velocity being adjacent the peripheral wall of the hydrocyclone. Moving in radially from the outer periphery toward
20 the longitudinal axis, the axial velocity component of the fluid mass decreases until it undergoes a reversal in direction representing the fluid stream that is heading toward the overflow outlet.

25 Accordingly, in seeking further capacity or efficiency improvements, one of the objectives of the present invention was to minimize turbulence internal to the hydrocyclone and thereby increase its performance. The capacity

improvement was achieved by recognizing that in order to minimize turbulence, the incoming fluid stream should be driven axially at different velocities, depending on the radial placement of the stream within the body. Accord-

5 ingly, the objective of improving throughput and/or separation efficiency has been accomplished in the present invention by recognizing this need to reduce turbulence and accommodating this performance-enhancing need by a specially designed back wall ramp featuring multiple side-by-side spiraling slopes, the steepest slope being furthest from the longitudinal axis with adjacent slopes becoming shallower as measured radially inwardly toward the
10 longitudinal axis. Those skilled in the art will more fully appreciate the significance of the present invention by a review of the detailed description of a preferred embodiment thereof below.

SUMMARY OF THE INVENTION

15 An improvement is made in the efficiency and/or throughput of a hydrocyclone by providing a back wall which imparts a greater axial velocity component to the fluids at the periphery as measured radially from the longitudinal axis of the hydrocyclone and a lesser axial velocity component to portions of the incoming fluid stream closer to the longitudinal axis of the hydrocyclone.
20 More particularly, the back wall should correspond generally to the swirl pattern within the hydrocyclone, a combination of axial and tangential velocity components, to enable the incoming fluid stream to reach the desired flow pattern more quickly and efficiently than otherwise possible.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an elevation view showing the different degrees of inclination of the outer and inner ramps.

5 Figure 2 is the view along lines 2-2 of Figure 1, showing the ramps from the underside looking up toward the overflow outlet.

Figure 3 is a perspective view, in part cutaway, illustrating the two ramps at different angles.

10 Figure 4 is a schematic representation of the velocity distributions in the axial direction shown superimposed on a section view through the overflow and underflow connections, with an alternative embodiment of a curved ramp.

Figure 5 is a section view through the ramp, showing that at any given section, the radial line from the longitudinal centerline coincides with the ramp surface.

15 Figure 6 is similar to Figure 5 except the two ramps shown are disposed when a line is extended across their surface in any given section across the longitudinal axis at an angle toward the longitudinal axis.

20 Figure 7 is an alternative embodiment of a multiple-ramp structure shown in the other figures, showing the ability to provide a greater axial component to the fluid stream furthest from a longitudinal axis and a lesser component closer to the longitudinal axis by having a surface with curves or arcs so as to make a smoother rather than a step-wise transition from one ramp to the other as shown, for example, in Figures 1 and 2.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The hydrocyclone 10 has an inlet 12 which can be tangential or an involute, as illustrated in Figure 3. One or more inlets can be used. The incoming flow stream is exposed to a steeper outer ramp 14, as well as the shallow or inner ramp 16. Figure 2 better illustrates the inlet 12 and the placement of the outer ramp 14 closest to the housing 18. A longitudinal axis 20 extends from the underflow exit 22 to the overflow exit 24. A wall 26 marks the inside of the inner ramp 16 and spirals around longitudinal axis 20 in a general direction parallel to longitudinal axis 20 in view of the fact that the body 18 is generally cylindrical in the area of ramps 14 and 16. In the embodiment illustrated in Figure 2, there are two inlets and the length of ramps 14 and 16 is generally 180°. Due to the spiraling orientation of ramps 14 and 16, they wind up radially adjacent to the opposing inlet by the time they have made a 180° turn inside the body 18. Figure 2 also illustrates the inner ramp 16 extending from the lower end of wall 26 and spiraling around in the same manner as the outer ramp 14 but at a different pitch, as illustrated in Figures 1 and 3. Accordingly, that portion of the inlet fluid which is ramped by the inner ramp 16 is ramped at a far shallower angle than the fluid which is radially furthest from the longitudinal axis 20 which is ramped by the outer ramp 14. The provision of the dual-ramp design minimizes internal turbulence within the hydrocyclone 10 and thus improves the throughput and/or efficiency of separation of a given body design. Test comparisons of an identically configured hydrocyclone for separating oil from water, having a single inner 3° ramp compared to the same design with both a 3° inner ramp and a 10° outer ramp were undertaken. Test results indicated an increase in capacity,

over a baseline hydrocyclone without such ramps, of 3% for the single-ramp design rising to 8% for the dual-ramp design without significantly affecting separation.

5 Referring now to Figure 3, the overflow outlet 50 is depicted aligned with centerline 20. The low ramp 16 is shown transitioning to the back wall 52. Back wall 52 can be flat and in a plane perpendicular to the longitudinal axis 20, or alternatively, it can be concave looking up or concave looking down with respect to the underflow connection 22 or overflow connection 24. The inner low ramp 16 can be configured to smoothly transition into the back wall 52, or they could be at different angles, all without departing from the spirit of the invention.

15 Figure 4 illustrates conceptually the change in axial component velocity measured on a radial line from the inside wall of the body 18 to the longitudinal centerline 20. Figure 4 illustrates that the downward axial component is greatest along the inside of wall 18 and diminishes in quantity in a downward direction until it undergoes a reversal at point 28. Thereafter, arrow 30 illustrates that a velocity increase in the opposite direction toward the overflow connection 24 is realized. The concept behind the multiple ramp of the present invention is to mimic as closely as possible the velocity profile illustrated in Figure 4, also allowing for changes in the tangential velocity profile. This can be accomplished with two or more ramps at different grades, disposed adjacent each other and extending from the inside of body 18 to centerline 20. Rather than having discrete ramps with differing grades disposed adjacent to each other with walls spiraling generally a fixed distance from the centerline 20, the ramp of the present invention can also be designed as a

20

25

continuous member which eliminates the step changes between the ramps which are taken up by wall 26, for example, as shown in Figure 2. Instead, as shown in Figure 4, the ramp 32 can have a steeper gradient adjacent the inner wall of body 18 and a shallower gradient toward the centerline 20, yet be composed of a more unitary construction with smoother transitions from one ramp gradient to the next and can employ curved surfaces for making such transitions, as schematically illustrated in the section view of Figure 4.

Figures 5, 6, and 7 illustrate alternative embodiments. Figure 5 corresponds to the dual-ramp design shown in Figure 2, shown in one specific section view through the hydrocyclone. In this embodiment, a line drawn parallel to the ramp surface at that particular section will wind up crossing the centerline 20 at approximately 90°. The change made to the ramp in Figure 6 is to basically present the multi-slope ramp in an inclined position such that a line parallel to the ramp surface in any particular section intersects the centerline 20 at some angle other than a right angle, as suggested in Figure 5. Figure 7 again indicates that step-wise changes between ramps can be vertical walls, as shown in Figure 5, or can be one or more arced surfaces to make the transition from a greater axial component toward the wall to a lesser one toward the centerline.

Accordingly, the provision of dual ramps makes a measured improvement in the capacity without sacrificing separation efficiency. The width of each ramp and the absolute angle with respect to the inlet 12 can be varied and the relative angles can also be varied without departing from the spirit of the invention. As previously stated, optimally for the particular design described above, the ramp angles are 3° and 10° for the inner and outer ramps

16 and 14, respectively. The ratio of gradients of the outer ramp 14 to the inner ramp 16 can be as low as about 1:2 and as high as about 1:5. With only a single inlet, the ramps can extend longer than 180° and can go around 360°.

5 The foregoing disclosure and description of the invention are illustrative and explanatory thereof, and various changes in the size, shape and materials, as well as in the details of the illustrated construction, may be made without departing from the spirit of the invention.

10

baker/patents/513 hydrocyclone.wpd ss

CLAIMS

- 1 1. A hydrocyclone, comprising:
2 a body having an inlet at the periphery of the body, an adjacent
3 back wall through which there is a central overflow connection and a central
4 underflow connection at the opposite end of the body;
5 the overflow back wall presenting an inclined face for redirecting
6 the stream of fluid entering the hydrocyclone to flow axially along the
7 hydrocyclone in at least two different paths having at least two axial velocity
8 components for improved phase separation performance.
- 1 2. The hydrocyclone of claim 1, wherein:
2 said body having a longitudinal axis extending from said overflow
3 connection to said underflow connection;
4 said face comprises a radially inner portion and a radially outer
5 portion, each defining a generally helical surface at a distinct slope extending
6 from adjacent said inlet toward said underflow connection.
- 1 3. The hydrocyclone of claim 2, wherein:
2 said inner radial portion extends at a shallower slope toward said
3 underflow connection than said outer radial portion.
- 1 4. The hydrocyclone of claim 3, wherein:
2 the slope of said outer radial portion extends at more than twice
3 the slope of that of said inner radial portion.

1 5. The hydrocyclone of claim 2, further comprising:
2 a wall disposed generally equidistant from said longitudinal axis
3 and marking a boundary between said inner and outer portions of said face.

1 6. The hydrocyclone of claim 1, wherein:
2 the end wall face comprises three or more radial portions.

1 7. The hydrocyclone of claim 6, wherein:
2 the slope of each radial portion is greater than that of the portion
3 spaced radially inwardly thereof.

1 8. The hydrocyclone of claim 1, wherein:
2 the end wall face presents a generally smooth, continuous sur-
3 face.

1 9. The hydrocyclone of claim 1, wherein:
2 at least a portion of the end wall face is inclined relative to the
3 longitudinal axis of the hydrocyclone.

1 10. The hydrocyclone of claim 2, wherein:
2 said helical surfaces are flat.

11. The hydrocyclone of claim 2, wherein:
said helical surfaces are curved.

12. A hydrocyclone substantially as
5 hereinbefore described with reference to the
accompanying drawings.

ABSTRACT OF THE INVENTION

An improvement is made in the efficiency and/or throughput of a hydro-cyclone by providing a multi-sloped back wall ramp which imparts a greater axial component to the fluids at the periphery as measured radially from the longitudinal axis of the hydrocyclone and a lesser axial component to portions

5 of the incoming fluid stream closer to the longitudinal axis of the hydrocyclone.

1/4

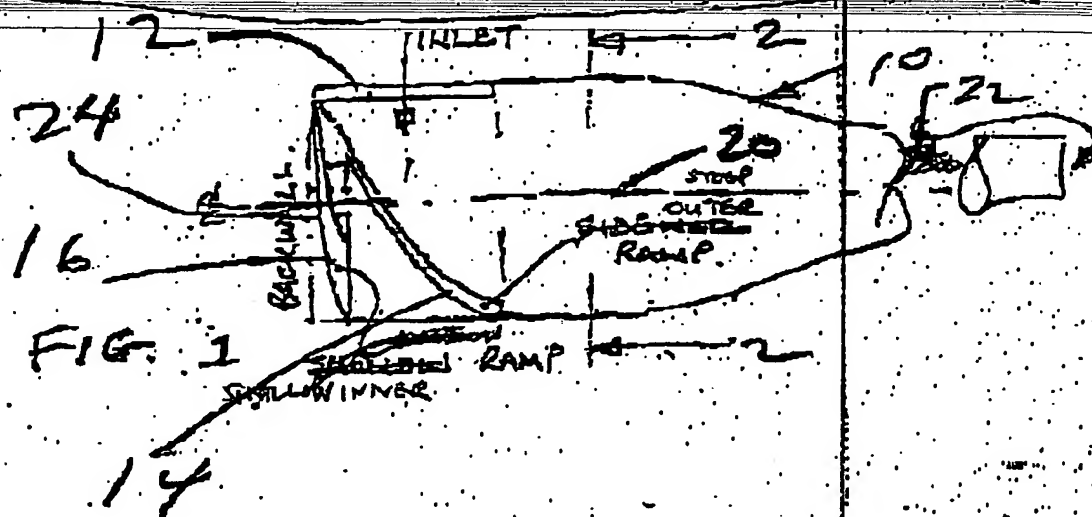


FIG. 1


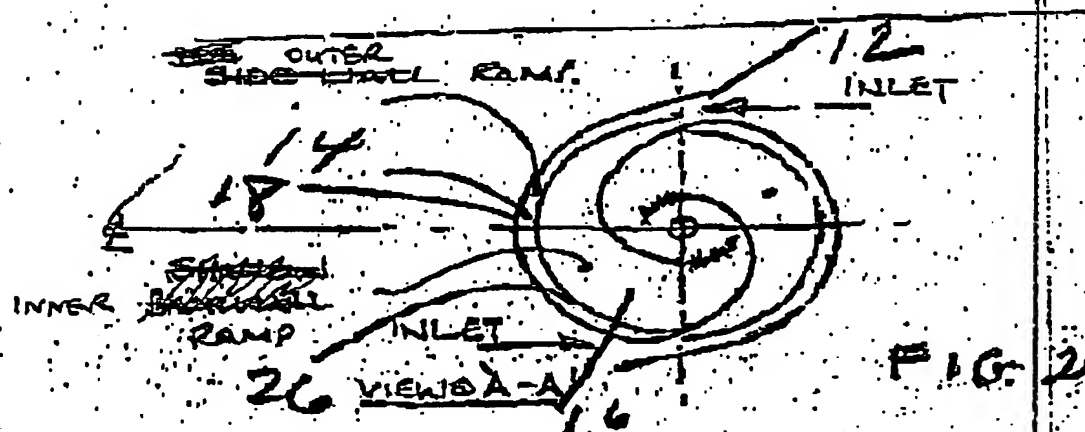


FIG. 2




2/4



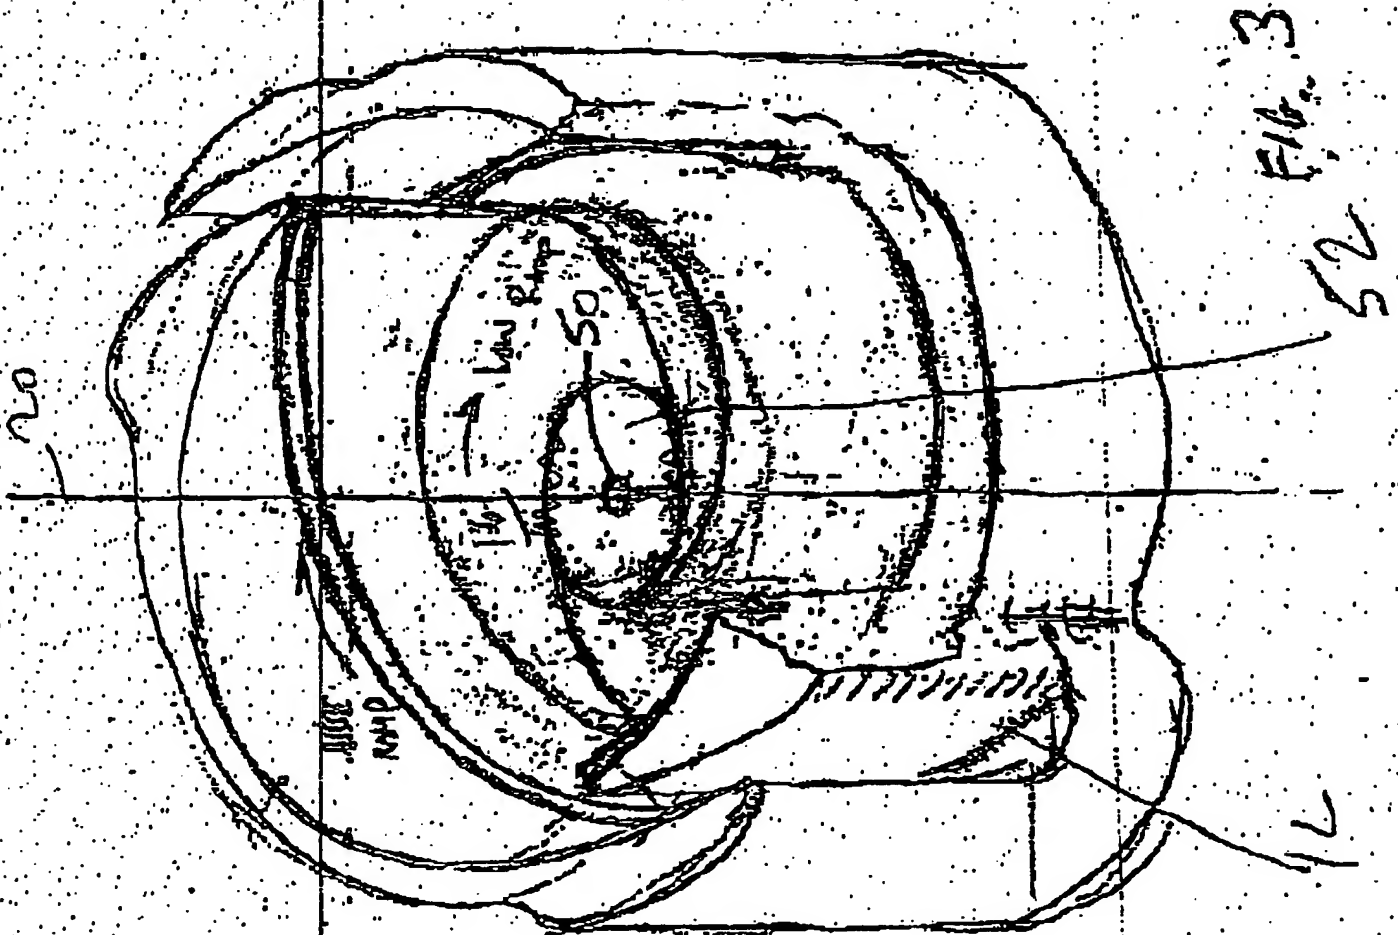

3/4

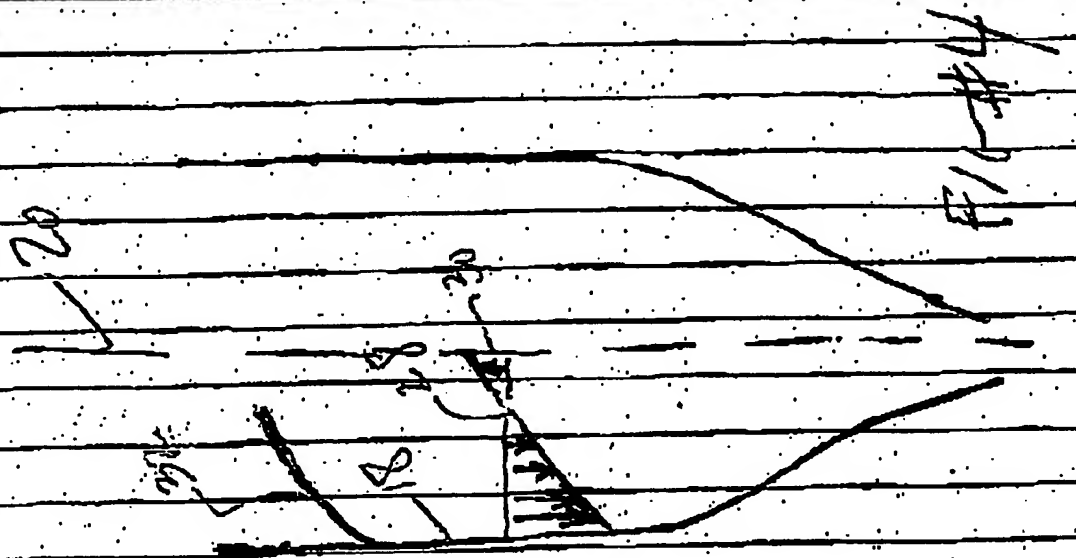

Velocity profile
Camp profile



4/4

OVERFLOW

#4

#2

#3

INLET

20

5
#10

FRAC

FRAC #1

11
#10

